


# 3M™ Scotch-Weld™ EPX

Two-component structural adhesives and applicator guns

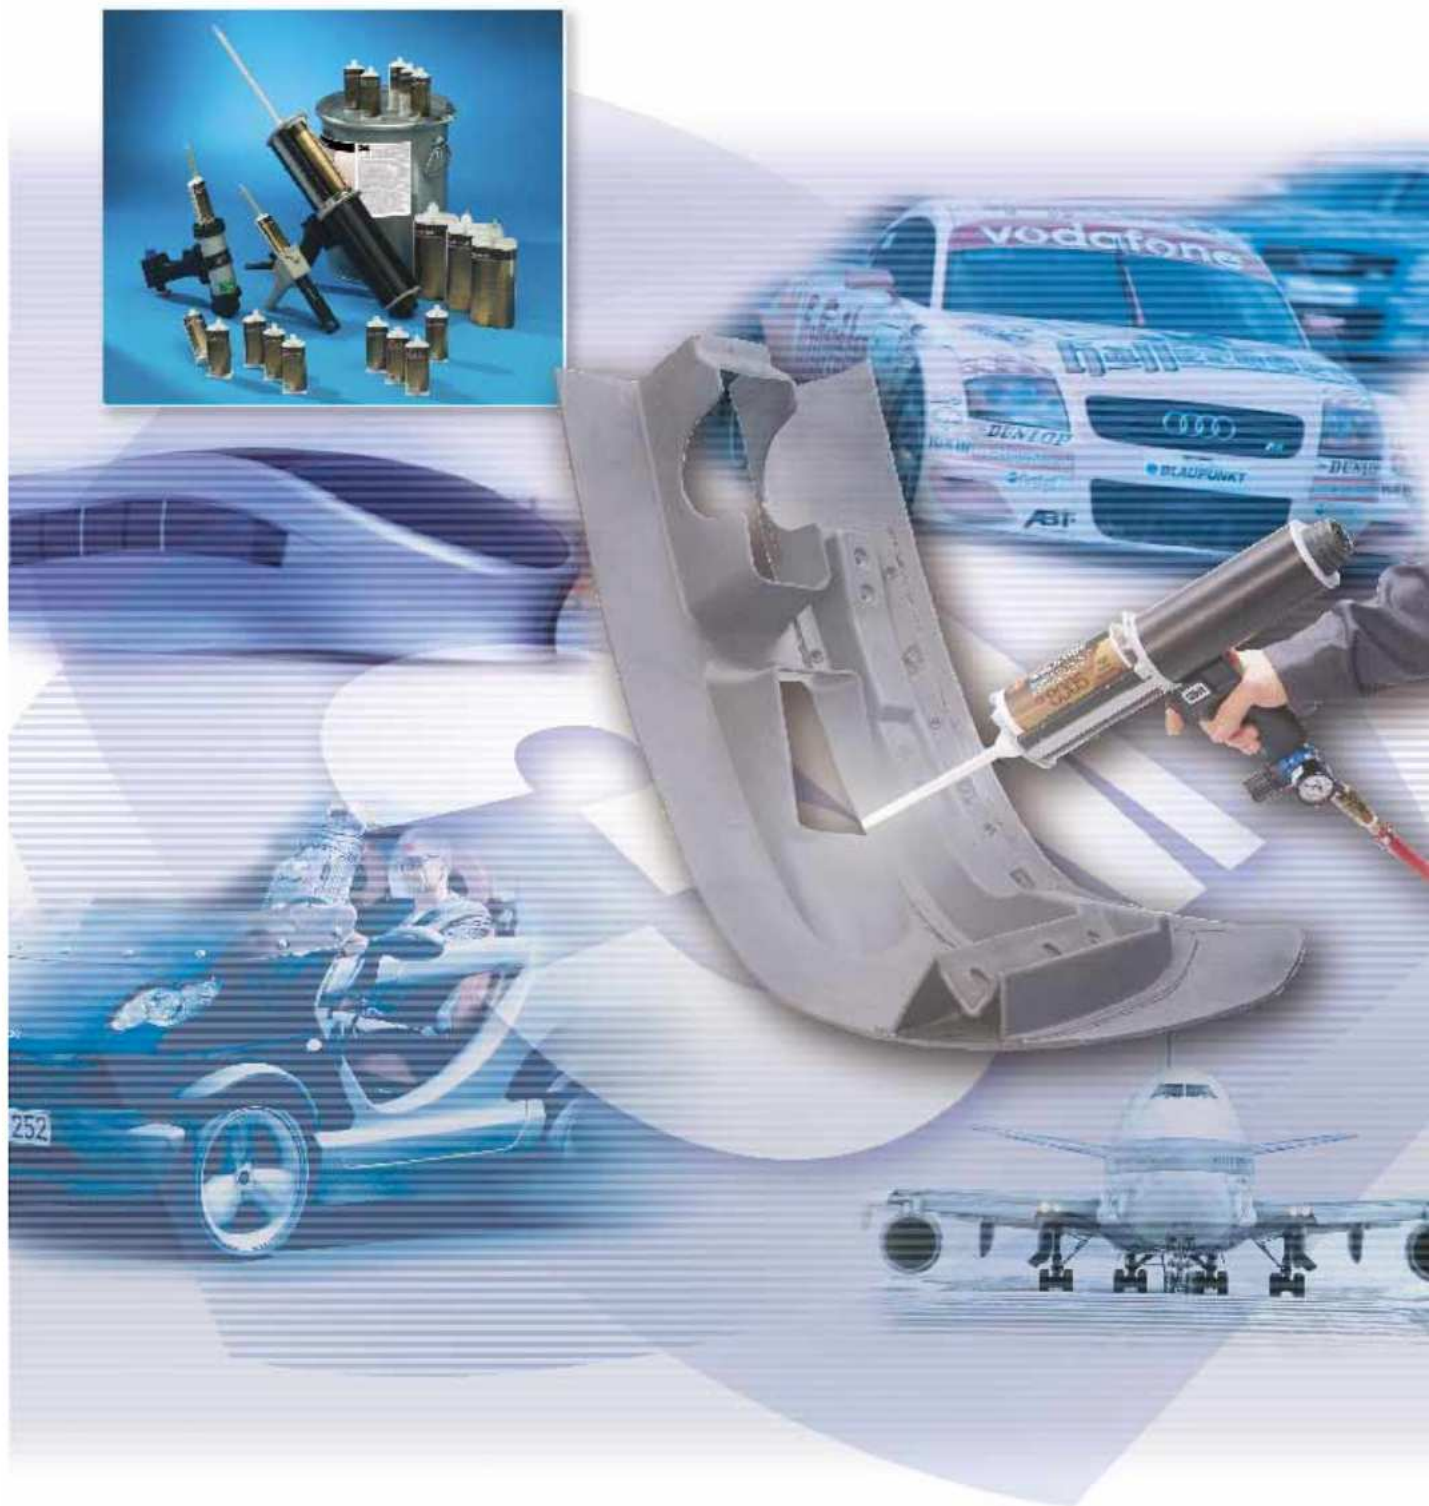

**3M** *Innovation*

## What is a structural adhesive?

3M's high-strength structural adhesives are fundamentally load-bearing formulations. Bond strength is often as strong as, or stronger than the materials joined.

Even a bonded area of 10 cm<sup>2</sup> (like in this picture) is sufficient to lift an average family car off the ground! In general, these structural adhesives have enough cohesive strength and creep resistance to permanently bond high-strength materials and they have the potential to replace mechanical and fusion fastening in many applications.



The 3M™ EPX application system for 2-component structural adhesives provides quick, economic, clean, precise processing and quick set-up times. It consists of:

- EPX manual applicators or EPX air-powered applicators
- Two-component adhesives in double cartridges
- Static mixing nozzles

The adhesive can be applied at selected points or in a continuous bead. Dosing, mixing and application are all achieved in one action, delivering constant, defined quality. These 3M structural adhesives achieve permanent high strength bonds with many materials such as metals, glass, ceramics, wood, technical plastics and rubbers etc.

The aircraft industry is one of the pioneers in use of structural adhesives. Many other industries have also been taking advantage of 3M's advanced formulations and innovative dispensing.

## Specifications

Product no. Adhesive type	Description
------------------------------	-------------

### EPOXY formulations

<b>DP 100</b> <i>rigid</i>	For metals, glass, ceramics and other materials. High shear strength for static loads. Excellent flow behaviour, therefore also well suited for potting. UL-listed.
<b>DP 105</b> <i>highly flexible</i>	Particularly for materials with different, high expansion factors. High strength. Very good flow behaviour, therefore also very well suited for potting.
<b>DP 110</b> <i>thoughened</i>	Especially good for bonding metal and plastic, for static and dynamic loads.
<b>DP 125</b> <i>flexible</i>	Especially good for bonding plastic and for metals, where flexibility and peel strength are required. As DP 190, but with quicker time to handling strength.
<b>DP 190</b> <i>flexible</i>	Especially good for bonding plastic and some types of rubber, as well as for metals, when flexibility and peel strength are required. UL-listed.
<b>DP 270</b> <i>fluid</i>	Especially good for electronics. For potting, protection and sealing. No corrosion on copper, minimal exothermal reaction (heat development) and shrinkage (therefore also for bonding optical parts, e.g. lenses). UL-listed.
<b>DP 410</b> <i>thoughened</i>	Outstanding stability under static and dynamic loads. High resistance to impact. Very good strength and excellent ageing characteristics.
<b>DP 460</b> <i>thoughened</i>	As DP 410, but longer work life. UL-listed.
<b>DP 490</b> <i>thoughened</i>	As DP 410, but with high temperature resistance (120°C). Thixotropic formulation, non-sag properties enable easy application to vertical surfaces.
<b>DP 760</b> <i>rigid</i>	Especially for applications that require very high temperature resistance (230°C).

### POLYURETHANE formulations

<b>DP 609</b> <i>flexible</i>	Especially for plastics and wood. Good peel strength, viscosity and flexibility. Minimal flow.
<b>DP 610</b> <i>flexible</i>	As DP609, but transparent, non-yellowing UV-resistant characteristics make it ideal for applications that require long term transparency and good visual effect. Good flow behaviour.

### ACRYLIC formulations

<b>DP 801</b> <i>thoughened</i>	Very good for plastics, elastomers and metals. Good resistance to impact. For static and dynamic loads. Short work life results in a fast development to handling strength.
<b>DP 810</b> <i>thoughened</i>	As DP 801, but longer work life. Significantly less odour than most acrylic adhesives.
<b>DP 8005</b> <i>thoughened</i>	New, innovative product especially for bonding Low Surface Energy plastics (like PE or PP) together or with other materials, without surface pre-treatment.
<b>DP 8010</b> <i>thoughened</i>	As above, longer work life of 10 minutes.

## Critical adhesive characteristics

**Rigid adhesive types** for applications with static loading and high shear strength (DP 100, DP 270, DP 760)

**Flexible adhesive types** for dynamic and shock loads (DP 105, DP 125, DP 190, DP 609, DP 610)

**Toughened adhesive types** which combine the advantages of hard and flexible types, i.e. with good peel strength, high shear strength and good impact resistance (DP 110, DP 410, DP 460, DP 490, DP 801, DP 810)



## Useful adhesive terminology

**Structural Adhesive** = Practical bond strength is at least 7 MPa in overlap shear at 24° C.

**Handling strength** = the time it takes assembled parts to reach a strength where further handling and processing can take place. Time will be dependant on the surface to be bonded, temperature and humidity.

**Work life** = the time during which an adhesive is liquid enough to adequately wet-out on a substrate.

**MPa** = 1 MPa = 1 N/mm<sup>2</sup> = 145 psi

**N/cm** = Newton / 1 cm width.

Product No.	Colour	Mix ratio (B:A)	Work life (minutes)	Time to handling strength	Viscosity	Shear strength (Aluminium, MPa) -55°C +23°C +80°C	Peel strength (Aluminium, N/cm)	Temperature
-------------	--------	-----------------	------------------------	------------------------------	-----------	---	------------------------------------	-------------

### EPOXY formulations

DP 100	transparent	1:1	3 to 5 min.	15 min.	fluid	6 9 2	4	-50 to 80°C
DP 105	transparent	1:1	4 to 5 min.	20 min.	fluid	24 14 2	62	-50 to 80°C
DP 110	translucent or grey	1:1	8 to 10 min.	20 min	controlled flow	14 18 1	35	-50 to 80°C
DP 125	grey	1:1	25 min.	2 to 3 hrs	controlled flow	24 24 3	62	-50 to 80°C
DP 190	grey	1:1	90 min.	4 to 6 hrs	controlled flow	11 18 3	21	-50 to 80°C
DP 270	transparent or black	1:1	60 to 70 min.	4 to 6 hrs	fluid	8 17 2	<4	-50 to 80°C
DP 410	off white	2:1	8 to 10 min.	30 min.	thixotropic	29 34 8	100	-50 to 80°C
DP 460	off white	2:1	60 min.	4 to 6 hrs	controlled flow	31 31 5	107	-50 to 80°C
DP 490	black	2:1	180 min.	4 hrs	thixotropic	24 30 12	92	-50 to 120°C
DP 760	white	2:1	45 to 60 min.	4 to 6 hrs	thixotropic	20 29 24	60	-50 to 230°C

### POLYURETHANE formulations

DP 609	off white	1:1	7 min.	45 min.	low	17 14 2	70	-50 to 80°C
DP 610	clear	1:1	10 min.	2 hrs	fluid	34 23 3	78	-50 to 80°C


### ACRYLIC formulations

DP 801	green	1:1	1 to 2 min.	7 min.	controlled flow	19 13 2	24	-50 to 80°C
DP 810	green	1:1	8 min.	10 to 15 min.	controlled flow	8 30 3	52	-50 to 80°C
DP 8005	white	10:1	2 to 3 min.	90 min.	thixotropic low	12* 6* 2*	28**	-50 to 80°C
DP 8010	white	10:1	10 min.	120 min.	thixotropic	6* 10* 2*	28**	-50 to 80°C


\* PP/PP \*\* HDPE

# EPX Adhesives Preselection



## Work life vs. Handling strength

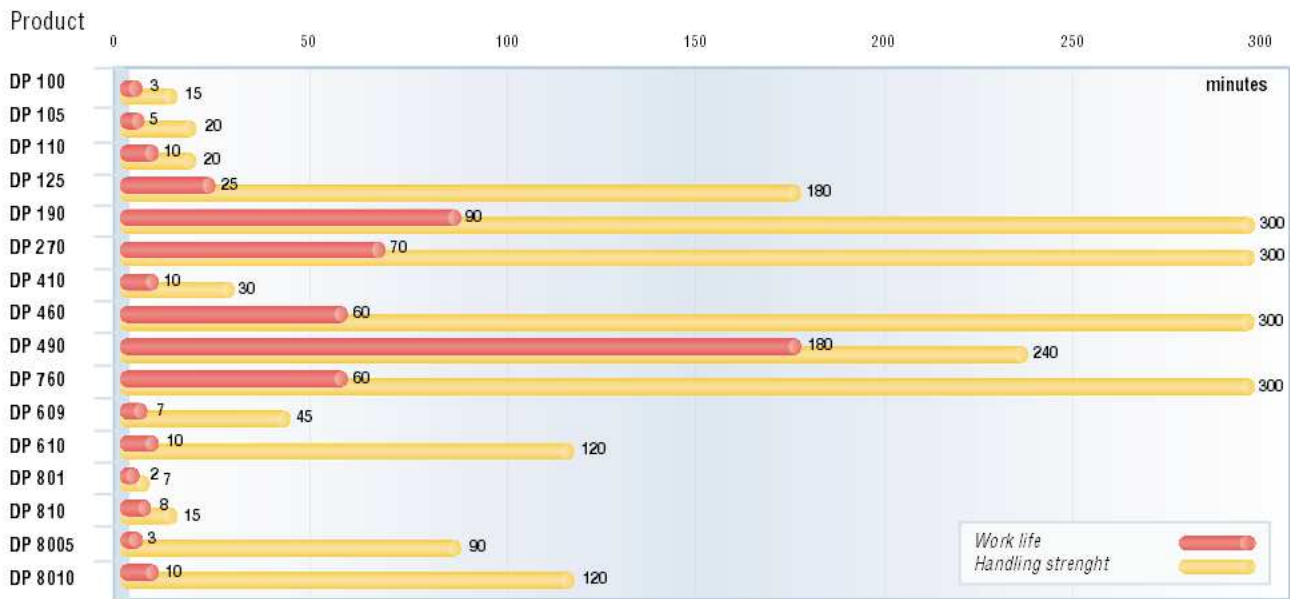


## Shear vs. Peel Strength on etched aluminium

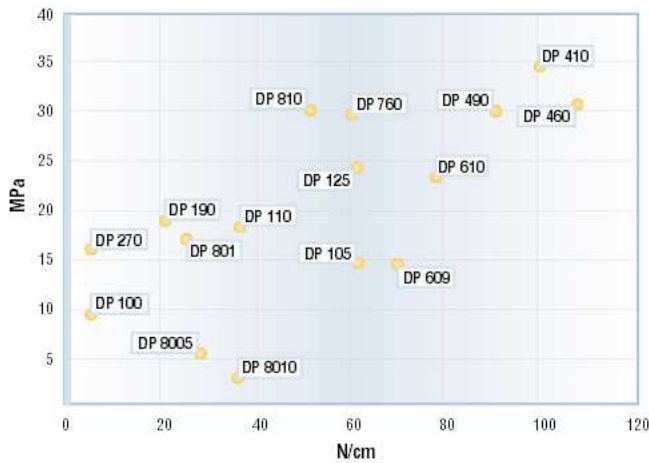

## Viscosity vs. Worklife

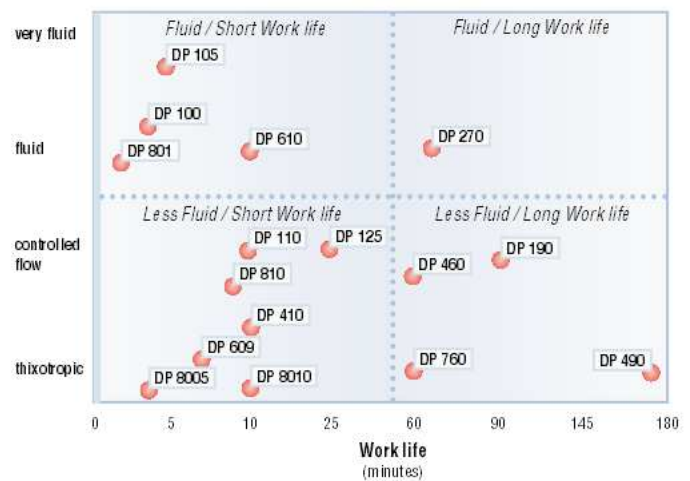


Tensile



Shear



Cleavage



Peel


**Tensile stress** is exerted equally over the entire joint and away from the adhesive bond.

**Shear stress** is across the adhesive bond. The bonded materials are forced to slide over each other.

**Cleavage stress** is concentrated at one edge and exerts a prying force on the bond.

**Peel stress** is concentrated along a thin line at the bond's edge. One surface is flexible.

Most applications are subject to a combination of stresses.

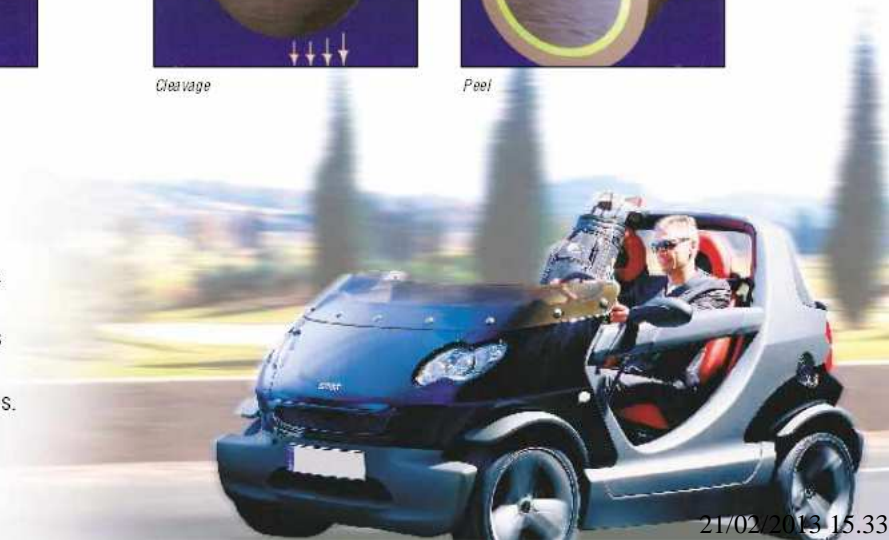

## Applications and benefits

The 3M™ Scotch-Weld™ EPX structural adhesives range is widely used in product assembly where high mechanical performance is required, and also for sealing and potting in electrical / electronic applications.

The EPX structural adhesives offer significant advantages – at a low investment cost:

- Reducing costs for combining different materials for the same or better performance;
- Eliminating secondary sealing or finishing operations, saving time and money;
- Achieving stronger and stiffer structures by improving stress distribution;
- Joining a wide variety of materials that are unable to be assembled by traditional methods of fastening.



Bonding a golf club head to shaft.  
3M Scotch-Weld DP 810



Bonding a seat cover to the ABS moulding  
3M Scotch-Weld DP 190



Bonding a magnet to a steel rotor  
3M Scotch-Weld DP 460



Bonding tubular joints for high impact applications  
3M Scotch-Weld DP 490



Encapsulating memory chips to protect against  
hacking of a digital set-top box  
3M Scotch-Weld DP 760



Bonding automotive interior parts (PU) to the dash-  
board (PP)  
3M Scotch-Weld DP 8005

## Operation Instructions

The EPX system of controlled two-component structural adhesives enables bonding operations to be carried out quickly, with precision and in four simple steps:



Slip the cartridge into the dispenser  
and close the dispenser's lock.



Unscrew the tip of the cartridge and  
fix the nozzle.



Pull the trigger for exact dispensing,  
the two components are mixed and  
applied at once.



The result is a clean and precise  
application without the user coming  
into contact with the adhesive.

## Equipment

The 3M™ Scotch-Weld™ EPX adhesive system includes:

### Applicators

All the applicators are ergonomically designed to minimise fatigue and ensure the maximum ease of use, particularly in “hard to get at” applications. There are manual and air-powered guns for 50 ml cartridges and an air-powered gun for the 400 ml cartridges. The selection of a manual or air-powered gun and the 50 ml or 400 ml cartridge depends upon the production requirement(s) for the application.

#### Air-powered applicator

The use of a compressed air feed enables operators to apply precisely the quantity of product required without interruption.

#### Manual applicator


The manual applicator is a light, reliable tool, which requires no special maintenance; it is particularly well suited to smaller scale use at multiple work-stations.

### Mixing Nozzles

The adhesive is extruded through a static mixing nozzle, which ensures that the two components are mixed together thoroughly every time. The mixing nozzle can be adapted to extrude different bead diameters by cutting the tip.



The EPX applicators

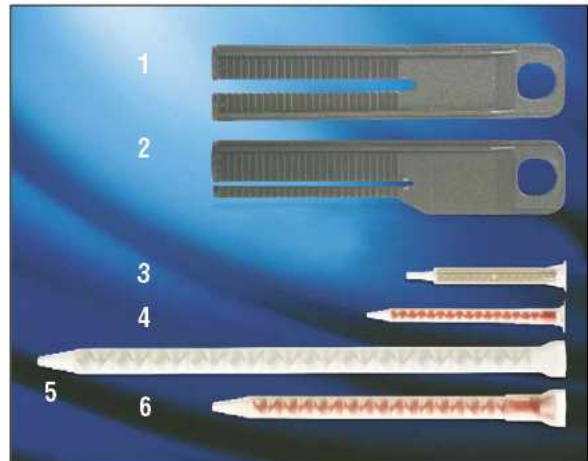

The EPX accessories

- 1 EPX manual applicator**  
complete with plunger 1:1/2:1 - suitable for 50 ml cartridges.  
*Note: for 38 ml 10:1 cartridges (DP 8005, DP8010), a 10:1 plunger is also required*
- 2 EPX air-powered applicator**  
for 1:1 and 2:1 50 ml cartridges
- 3 EPX air-powered applicator 8501**  
for 1:1 and 2:1 400 ml cartridges  
**EPX air-powered applicator (not shown)**  
for DP 8005, DP 8010, 265 ml cartridges

**Supply form:** Duo pack cartridges  
1:1 and 2:1 mix ratio = 50 ml and 400 ml  
10:1 mix ratio = 38 ml and 265 ml  
**Bulk versions** on request

- EPX plunger for EPX manual applicator:**
- 1** Type 1:1/2:1 for all 50 ml cartridges
- 2** Type 10:1 for 38 ml cartridge (DP 8005, DP 8010)
- EPX mixing nozzles for cartridges:**
- 3** Quadro nozzle for 50 ml cartridges (except DP 8005, DP 8010)
- 4** 17 Element nozzle for DP 8005, DP 8010, 38 ml
- EPX mixing nozzles for large cartridges:**
- 5** 24 Element nozzle for all 400 ml cartridges
- 6** 18 Element nozzle for DP 8005, DP 8010, 265 ml cartridge

#### Important Notice:

All declarations, technical information and recommendations in this brochure are based on tests we believe to be reliable, but we are unable to guarantee their complete accuracy. Before using our product, please make sure it is suitable for the intended use. Any question concerning the reliability of 3M adhesives is subject to the applications of the terms and conditions of sale and any applicable legislation.

**3M**

CJ1015 - PE-BE-SB-18

3M and Scotch-Weld are registered trademarks of the 3M Company.