

TECHNICAL DATASHEET

1675

(Resin 1673 + Hardener 1664)

Description

1675 is a non-sagging, two-part modified methacrylate adhesive designed for structural bonding of thermoplastic, metal, and composite assemblies. Combined at a 10:1 (V:V) mixing ratio, it has a working time of 2 to 4 minutes. The fast strength build up provides short cycle times (~4 min up to 10 N/mm²). The cured adhesive offers a balanced profile of properties with high stiffness combined with a strong toughness. 1675 is mainly used as an universal grade for industrial applications where composites are involved.

1675 fulfills the requirements according to DIN EN 45545-2 chart 5, R1, R7 and R17 with HL1-3.

Advantages

- Good adhesion to a wide range of materials
- Non-dropping paste
- Bridges gap up to 10 mm
- Minimum gap 75 µm (Spacer)
- Optically visible hardening process – colour changes from blue to green
- Excellent resistance against dynamic loads
- Resistant against outside conditions and humidity
- 100% reactive compound
- Low odour
- High flashpoint

Product data

Chemical base	Modified methacrylate
Curing system	2-Component-System
Mixing ratio by volume	10 : 1 (Resin 1673 : Hardener 1664)
Colour (after curing)	Olive green

Physical properties (uncured):


Viscosity	Resin	1673	~100'000 mPa·s
	Hardener	1664	~50'000 mPa·s
Density	Resin	1673	1.07 g/cm ³
	Hardener	1664	1.15 g/cm ³
Colour	Resin	1673	Off-white
	Hardener	1664	Blue
Shelf life			12 month at 4 – 23 °C
Flashpoint			> 60°C
Gap filling			Up to 10 mm
Minimum gap / Spacer			75 µm

Curing properties:

Application temperature	+10 °C to +40 °C
Open time	2 – 4 minutes
Fixture strength [$\sim 1 \text{ N/mm}^2$]	~ 4 minutes
Functional strength [$\sim 10 \text{ N/mm}^2$]	~ 5 minutes
Final strength	12 hours
Volume shrinkage	$\sim 8 \%$

Tensile shear strength according to DIN EN 1465, at 23°C steel-steel corundum-blasted

Strength build-up

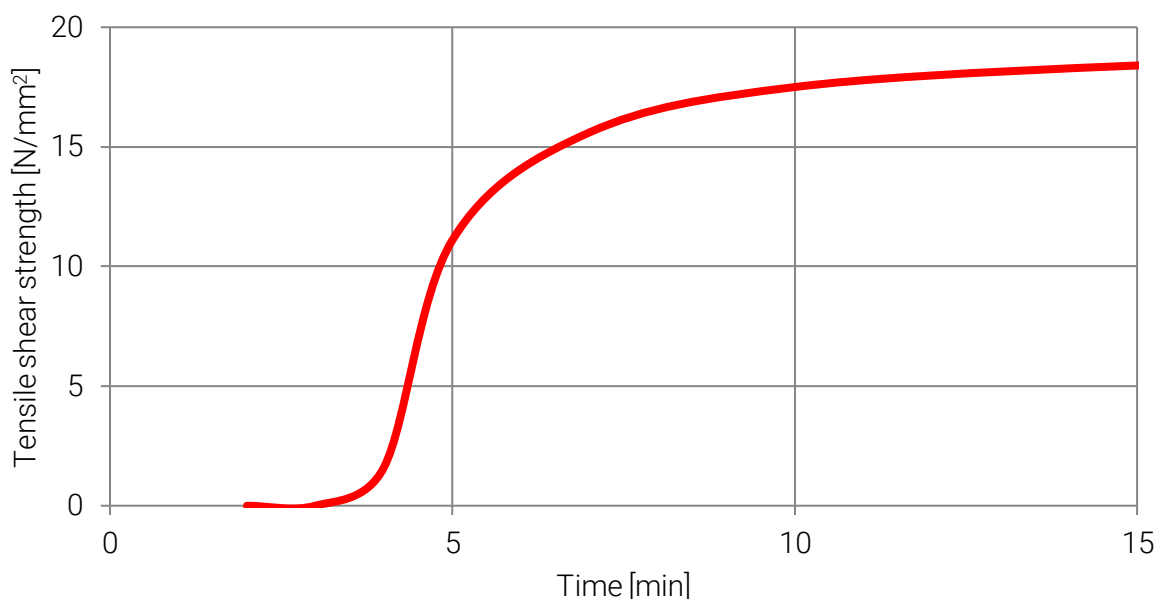


Physical properties (cured):

Usage temperature

- 55°C to + 120°C

Tensile shear strength according to DIN EN 1465

Curing: 24 hours at 23 °C, 1 hour test temperature, steel corundum blasted

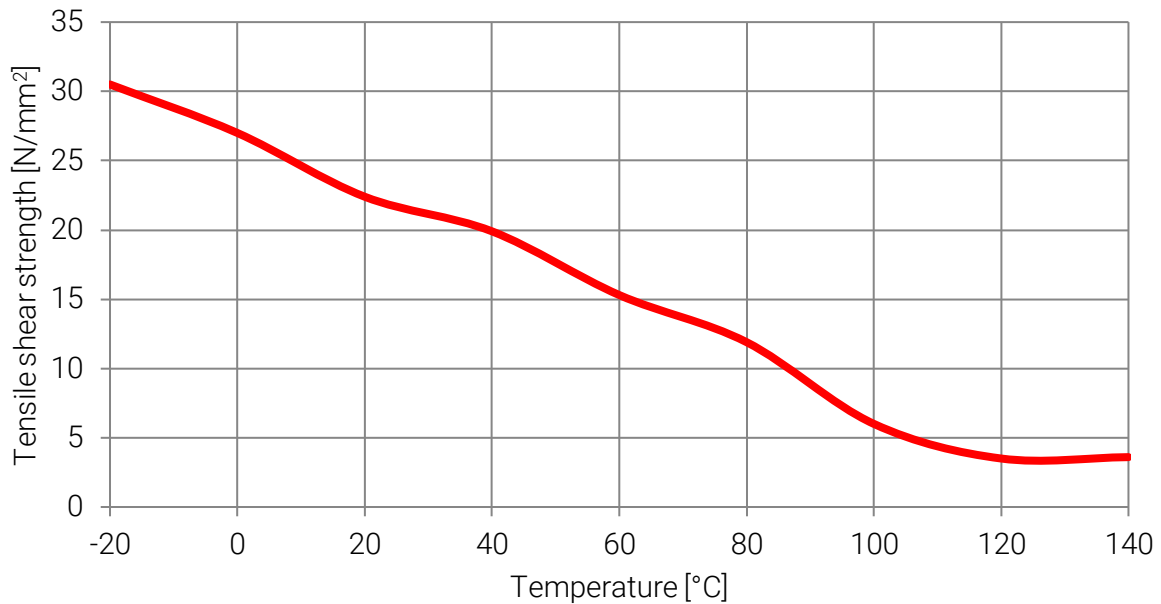

E modulus (DIN EN ISO 178)
after 24 h at 23°C

~ 780 N/mm²

Tensile strength (ISO 527 1A)
after 24 h at 23°C

~ 17 N/mm²

Elongation at break (ISO 527 1A)
after 24 h at 23°C

~ 85 %

Impact strength IZOD
after 24 h at 23°C

~ 8 kJ/m²

Shore D

~ 65

Lap shear strength (DIN EN 1465)

Curing: 24 hours at 23 °C, test temperature 23 °C, metals corundum blasted

Steel

~ 22 N/mm²

Aluminium

~ 21 N/mm²

CFRP Epoxy

~ 25 N/mm²

GFRP

~ 15 N/mm²

Oak

~ 8 N/mm² (X)

(X) = Failure of test specimen

Lap shear strength (DIN EN 1465)

Curing: 24 hours at 23 °C, test temperature 23 °C, metals corundum blasted

Aluminium – PC

~ 10 N/mm² (X)

Aluminium – ABS

~ 6 N/mm² (X)

ABS

> 5 N/mm² (X)

PC

> 7 N/mm² (X)

PVC

> 4 N/mm² (X)

PMMA

> 5 N/mm² (X)

(X) = Failure of test specimen

Chemical resistance

Excellent in

Hydrocarbons

Acidic solutions (pH 3 – 10)

Alkaline solutions (pH 3 – 10)

Salt solutions


Unstable in

Polar solvents

Strong Acidic/alkaline solutions

Chemical resistance

Tensile shear strength acc. to DIN EN 1465; steel plates degreased and corundum-blasted; curing for 7 days at 23 °C, storage for 30 days at 23 °C (excepted: Cataplasma); % to the reference

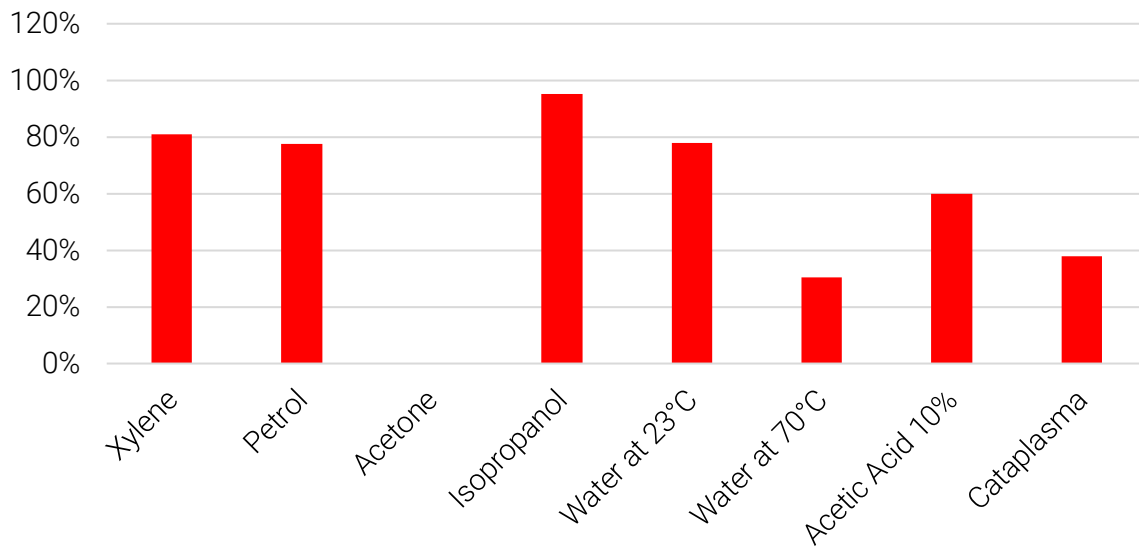

Handling and storage

Due to the high reactivity of the product and the exothermic curing process, never mix bigger amount of the components. The heat might evaporate parts of the formulation and cause strong smell. Do not waste exceeded material in plastic containers, because of the danger of melting.

Slight serum formation may occur during storage.

The serum does not imply any quality issues and can be ejected when levelling the cartridge before first use.

Precautions

For your own safety, please refer to the information of the concerned MSDS and for the correct handling the "user instructions".

The information in this data sheet is based on the results of our research and experience. However, the suggestions herein concerning the use, application, and processing of the products (collectively, „the methods“) **are non-binding recommendations only**. It is the user's sole responsibility to determine the suitability and safety of these methods, based on the user's particular purpose in using the products. Before relying on the reliability and safety of any parts that are bonded using the products, it is extremely important that the user test the reliability and safety of the parts that are bonded. Failure to do so could result in serious personal injury. Because of the use of the products are within the purchaser's sole control, Kisling Corporation specifically disclaims all warranties, express or implied, including warranties of merchantability or fitness for a particular purpose, arising from the sale or use of the products described herein. Kisling Corporation specifically disclaims any liability for consequential, incidental, or other damages of any kind, including lost profits. Kisling Corporation's liability for damages shall not exceed the purchase price of the products used.

TIS_1675_e/PC/13.09.2022